


## 8 Pocket

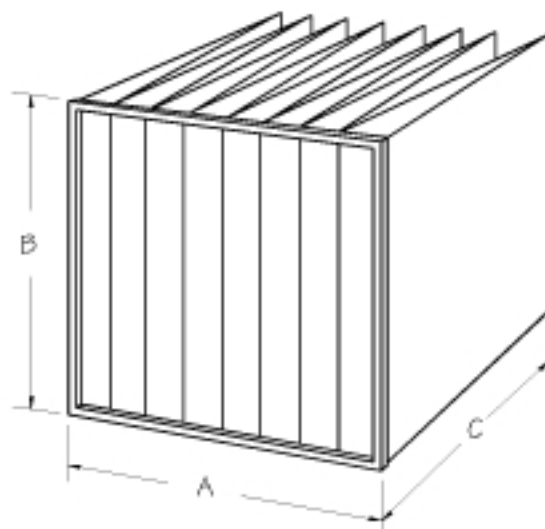

## Reliable Air Flow Bag, 85%

### Characteristics

Media: 100% Synthetic Polypropylene Microfiber

Pockets: Ultrasonically Welded Seams & Edges

Pocket Flutes: Ultrasonically Welded Support Spacers

Header: Electro-Galvanized Metal Header and "J" Style Media Retainers

### Air Flow Bag 85%-8 Pocket

| Model Number | Width "A" | Height "B" | Depth "C" | Number of Pockets | Air Flow Capacity (cfm) | Initial Resistance ("w.g.) |
|--------------|-----------|------------|-----------|-------------------|-------------------------|----------------------------|
| AFB885S-4430 | 23-3/8"   | 23-3/8"    | 30"       | 8                 | 2000                    | .28                        |
| AFB885S-4426 | 23-3/8"   | 23-3/8"    | 26"       | 8                 | 1500                    | .26                        |
| AFB885S-4422 | 23-3/8"   | 23-3/8"    | 22"       | 8                 | 1500                    | .28                        |
| AFB885S-4415 | 23-3/8"   | 23-3/8"    | 15"       | 8                 | 1000                    | .28                        |
| AFB685S-0430 | 19-3/8"   | 23-3/8"    | 30"       | 6                 | 1500                    | .28                        |
| AFB685S-0426 | 19-3/8"   | 23-3/8"    | 26"       | 6                 | 1125                    | .26                        |
| AFB685S-0422 | 19-3/8"   | 23-3/8"    | 22"       | 6                 | 1125                    | .28                        |
| AFB685S-0415 | 19-3/8"   | 23-3/8"    | 15"       | 6                 | 750                     | .28                        |
| AFB485S-2430 | 11-3/8"   | 23-3/8"    | 30"       | 4                 | 1000                    | .28                        |
| AFB485S-2426 | 11-3/8"   | 23-3/8"    | 26"       | 4                 | 750                     | .26                        |
| AFB485S-2422 | 11-3/8"   | 23-3/8"    | 22"       | 4                 | 750                     | .28                        |
| AFB485S-2415 | 11-3/8"   | 23-3/8"    | 15"       | 4                 | 500                     | .28                        |

### Notes:

Standard: UL 900, Class 2

Available with the following gasketing options:

- GU - Gasket Upstream
- GD - Gasket Downstream
- GS - Gasket Sides

### Other Options:

- C - Cambridge Header
- 1 - UL 900, Class 1

An example of the part number with options is: AFB885S-4430GU

## DAYTON RELIABLE AIR FILTER

2294 N. Moraine Dr.  
Dayton, Ohio 45439  
1-800-699-0747



Air Flow Bag 85%, MERV 13  
8 Pocket

|          |             |          |
|----------|-------------|----------|
| Date     | Part Number | Revision |
| Approved |             |          |
|          | AFB885S     |          |