


## 12 Pocket

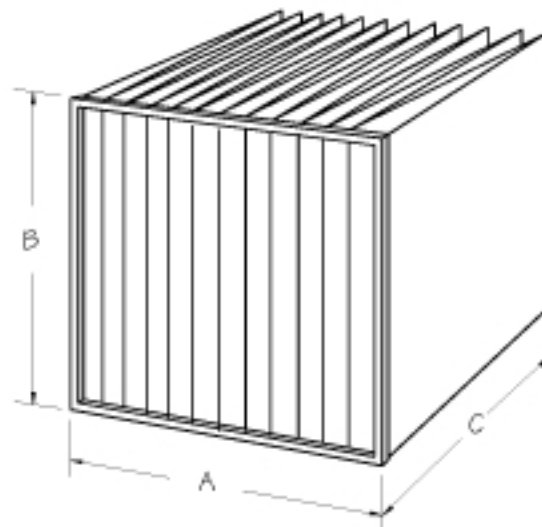

**Reliable Air Flow  
Bag, 85%**

### Characteristics

Media: 100% Synthetic Polypropylene Microfiber

Pockets: Ultrasonically Welded Seams & Edges

Pocket Flutes: Ultrasonically Welded Support Spacers

Header: Electro-Galvanized Metal Header and "J" Style Media Retainers

Air Flow Bag 85% - 12 Pocket

Model Number	Width "A"	Height "B"	Depth "C"	Number of Pockets	Air Flow Capacity (cfm)	Initial Resistance ("w.g.)
AFB1285S-4415	23-3/8"	23-3/8"	15"	12	1500	.25
AFB1085S-0415	19-3/8"	23-3/8"	15"	10	1250	.25
AFB1085S-0015	19-3/8"	19-3/8"	15"	10	1000	.25
AFB685S-2415	11-3/8"	23-3/8"	15"	6	750	.25

### Notes:

Standard: UL 900, Class 2

Available with the following  
gasketing options:

GU - Gasket Upstream

GD - Gasket Downstream

GS - Gasket Slides

Other Options:

C - Cambridge Header

-1 - UL 900, Class 1

An example of the part number  
with options is: AFB1285S-4415GU

## DAYTON RELIABLE AIR FILTER

2294 N. Moraine Dr.  
Dayton, Ohio 45439  
1-800-699-0747



Air Flow Bag 85%, MERV 13,  
12 Pocket

Date	Part Number	Revision
Approved	AFB1285S	