


**Reliable V-Cell  
Filter - 85%**

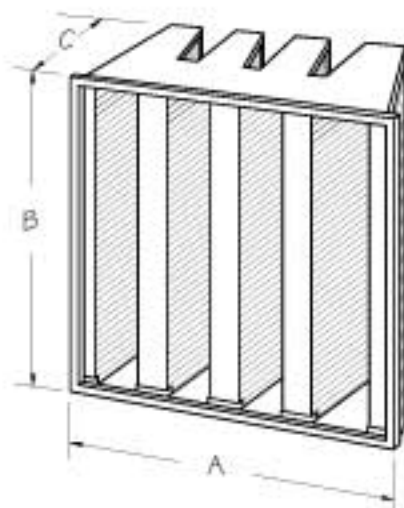

Characteristics

Media: Synthetic polypropylene microfiber.

Continuous polypropylene spacer beads thermally bonded to both sides of media.

Frame: 100% polymer, no metal components.

Frame to media adhesive: Solid, water-resistant adhesive.

Air Flow V 85% - MERV 13			
Model Number	Width "A"	Height "B"	Depth "C"
AFV85-4412	23-3/8"	23-3/8"	11-1/2"
AFV85-4212	23-3/8"	11-3/8"	11-1/2"
AFV85-4012	23-3/8"	19-3/8"	11-1/2"

Notes:

UL 900, Class 2

Initial Resistance:

@ 500 FPM: 0.36" w.g.

Available with the following gasketing options:

GU - Gasket Upstream

GD - Gasket Downstream

GS - Gasket Sides

An example of the part number with options is: AFV85-4412GU

**DAYTON RELIABLE AIR FILTER**

**2294 N. Moraine Dr.  
Dayton, Ohio 45439  
1-800-699-0747**



Air Flow V 85%, MERV 13

Date	Part Number	Revision
Approved	AFV85	