


**Reliable V-Cell
Filter - 95%**

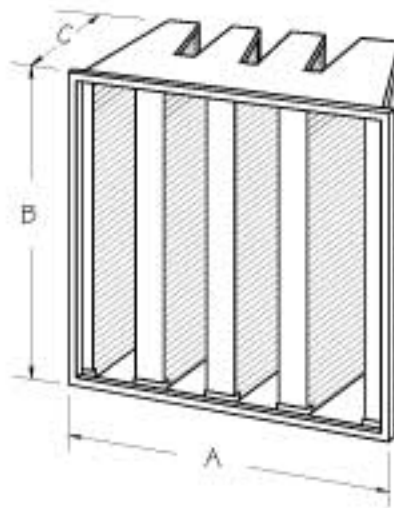

Characteristics

Media: Synthetic polypropylene microfiber.
 Continuous polypropylene spacer beads thermally bonded to both sides of media.
 Frame: 100% polymer, no metal components.
 Frame to media adhesive: Solid, water-resistant adhesive.

Air Flow V 95% - MERV 14			
Model Number	Width "A"	Height "B"	Depth "C"
AFV95-4412	23-3/8"	23-3/8"	11-1/2"
AFV95-2412	11-3/8"	23-3/8"	11-1/2"
AFV95-4012	23-3/8"	19-3/8"	11-1/2"

Notes:

UL 900, Class 2

Initial Resistance:

@ 500 FPM: 0.36" w.g.

Available with the following gasketing options:

- GU - Gasket Upstream
- GD - Gasket Downstream
- GS - Gasket Sides

An example of the part number with options is: AFV95-4412GU

DAYTON RELIABLE AIR FILTER

**2294 N. Moraine Dr.
Dayton, Ohio 45439
1-800-699-0747**



Air Flow V 95%, MERV 14

Date	Part Number AFV95	Revision
Approved		